

TRAME


Horizontal

Additional colour charge

The additional charges are calculated on the base price of RAL 9010.

| | |
|-------------------|--|
| C0 Category | without any additional charge (RAL 9010) |
| C1 Category | +10% |
| C2 Category | +20% |
| C3 Category* | +20% |
| Colours according | to samples request feasibility and cost estimate |
| PLATED finishes | NOT available |

* excluding the GRGR chrome grey colour which is NOT available

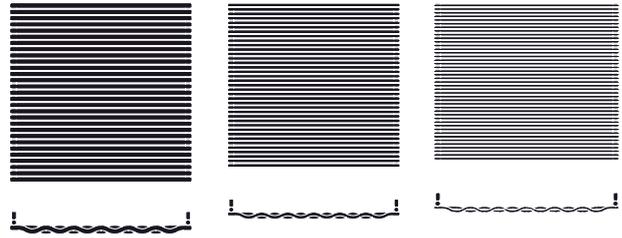

TRAME 28

TRAME 20

TRAME 14

Supports

The TRAME vertical model can only be installed on the wall with the specific brackets which are included in the price.

The kit however does not contain the screws and anchors for fixing the brackets to the wall.

Packing


The cardboard packing box is included in the price of sale of the products, and it contains the following components:

- the radiator ordered
- the wall-fixing brackets
- manual vent valve


Rear Connectors

Enable connection to the system vain GVR (Remote Valve Assembly) supplied as an accessory.


STANDARD CONNECTORS:
OR1 at the bottom



CONNECTORS UPON REQUEST:
RS2 left




CONNECTORS UPON REQUEST:
RD2 right



External connectors

Allow connection to the system TRADITIONAL VALVE AND LOCKSHIELD, supplied as accessories with additional charge. €

CONNECTORS UPON REQUEST:
OB2 at the bottom



SPECIFY D E I
D MIN.= 2 CM I MIN. = 5 CM

TRAME Horizontal

TRAME 14 / Horizontal

| N° El. | Height (cm) | Width (cm) | | | | | | | | | |
|--------|-------------|-----------------------|--|-----------------------|--|-----------------------|--|-----------------------|--|-----------------------|--|
| | | 52,5 | | 67,0 | | 96,0 | | 125,0 | | 154,0 | |
| | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C | |
| 21 | 40,0 | 342 | | 437 | | 626 | | 815 | | 1004 | |
| 31 | 59,0 | 464 | | 592 | | 849 | | 1105 | | 1361 | |
| 43 | 81,8 | 606 | | 773 | | 1108 | | 1443 | | 1777 | |
| 47 | 89,4 | 653 | | 833 | | 1194 | | 1555 | | 1915 | |
| 53 | 100,8 | 723 | | 923 | | 1323 | | 1723 | | 2122 | |
| 69 | 131,2 | 914 | | 1166 | | 1671 | | | | | |
| 79 | 150,2 | 1036 | | 1322 | | 1894 | | | | | |
| 89 | 169,2 | 1161 | | 1481 | | | | | | | |
| 95 | 180,6 | 1237 | | 1579 | | | | | | | |
| 103 | 195,8 | 1341 | | 1712 | | | | | | | |

TRAME 14 Electric


| Height (cm) | Width (cm) | watt Resistance | Resistance Type |
|-------------|------------|-----------------|-----------------|
| 40,0 | 52,5 | 300 W | Classe 2 |
| 81,8 | 52,5 | 600 W | Classe 2 |
| 131,2 | 52,5 | 900 W | Classe 2 |
| 180,6 | 52,5 | 1200 W | Classe 2 |

TRAME 14 Mixed

| Height (cm) | Width (cm) | watt Resistance | Resistance Type | Standard mixed version | | Mixed version with kit | |
|-------------|------------|-----------------|-----------------|------------------------|--|-------------------------------|--|
| | | | | Centre distance | | Mixed version centre distance | |
| 40,0 | 52,5 | 300 W | Classe 2 | 48,5 | | 41,3 | |
| 81,8 | 52,5 | 600 W | Classe 2 | 48,5 | | 41,3 | |
| 131,2 | 52,5 | 900 W | Classe 2 | 48,5 | | 41,3 | |
| 180,6 | 52,5 | 1200 W | Classe 2 | 48,5 | | 41,3 | |

Electric / Mixed

Standard electric




Standard mixed with rear connectors



Mixed with kit and with external connectors




Electric with ambient temperature thermostat



Mixed with ambient temperature thermostat and with rear connectors



Mixed with kit with ambient temperature thermostat and with external connectors



TRAME Horizontal

TRAME 20 / Horizontal

| N° El. | Height (cm) | Width (cm) | | | | | | | | | | | | |
|--------|-------------|---------------|--|---------------|--|---------------|--|---------------|--|---------------|--|---------------|--|---------------|
| | | 52,5 | | 67,0 | | 96,0 | | 125,0 | | 154,0 | | 183,0 | | 196,0 |
| | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C |
| 17 | 42,0 | 339 | | 432 | | 619 | | 806 | | 993 | | 1180 | | 1264 |
| 25 | 62,0 | 479 | | 611 | | 876 | | 1141 | | 1405 | | 1670 | | 1788 |
| 33 | 82,0 | 614 | | 784 | | 1123 | | 1462 | | 1801 | | | | |
| 37 | 92,0 | 680 | | 868 | | 1243 | | 1619 | | 1994 | | | | |
| 41 | 102,0 | 745 | | 950 | | 1362 | | 1773 | | 2185 | | | | |
| 51 | 127,0 | 903 | | 1153 | | 1652 | | | | | | | | |
| 61 | 152,0 | 1057 | | 1349 | | 1933 | | | | | | | | |
| 69 | 172,0 | 1177 | | 1502 | | | | | | | | | | |
| 73 | 182,0 | 1236 | | 1578 | | | | | | | | | | |
| 77 | 192,0 | 1295 | | 1653 | | | | | | | | | | |

TRAME 20 Electric


| Height (cm) | Width (cm) | watt Resistance | Resistance Type |
|-------------|------------|-----------------|-----------------|
| 42,0 | 52,5 | 300 W | Classe 2 |
| 82,0 | 52,5 | 600 W | Classe 2 |
| 127,0 | 52,5 | 900 W | Classe 2 |
| 182,0 | 52,5 | 1200 W | Classe 2 |

TRAME 20 Mixed

| Height (cm) | Width (cm) | watt Resistance | Resistance Type | Standard mixed version | | Mixed with kit version | |
|-------------|------------|-----------------|-----------------|------------------------|--|-------------------------------|--|
| | | | | Centre distance | | Mixed version centre distance | |
| 42,0 | 52,5 | 300 W | Classe 2 | 48,5 | | 41,3 | |
| 82,0 | 52,5 | 600 W | Classe 2 | 48,5 | | 41,3 | |
| 127,0 | 52,5 | 900 W | Classe 2 | 48,5 | | 41,3 | |
| 182,0 | 52,5 | 1200 W | Classe 2 | 48,5 | | 41,3 | |

Electric / Mixed

Standard electric




Standard mixed with rear connectors



Mixed with kit and with external connectors




Electric with ambient temperature thermostat



Mixed with ambient temperature thermostat and with rear connectors



Mixed with kit with ambient temperature thermostat and with external connectors



TRAME 28 / Horizontal

| N° El. | Height (cm) | Width (cm) | | | | | | | | | | | | |
|--------|-------------|-----------------------|--|-----------------------|--|-----------------------|--|-----------------------|--|-----------------------|--|-----------------------|--|-----------------------|
| | | 52,5 | | 67,0 | | 96,0 | | 125,0 | | 154,0 | | 183,0 | | 196,0 |
| | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C |
| 13 | 42,4 | 343 | | 438 | | 627 | | 816 | | 1006 | | 1195 | | 1280 |
| 19 | 62,2 | 475 | | 606 | | 869 | | 1131 | | 1394 | | 1656 | | 1774 |
| 25 | 82,0 | 604 | | 770 | | 1104 | | 1437 | | 1770 | | | | |
| 29 | 95,2 | 688 | | 878 | | 1258 | | 1638 | | 2018 | | | | |
| 39 | 128,2 | 897 | | 1145 | | 1640 | | 2136 | | | | | | |
| 47 | 154,6 | 1064 | | 1358 | | 1946 | | | | | | | | |
| 51 | 167,8 | 1148 | | 1465 | | | | | | | | | | |
| 55 | 181,0 | 1232 | | 1573 | | | | | | | | | | |
| 59 | 194,2 | 1317 | | 1681 | | | | | | | | | | |

TRAME 28 Electric


| Height (cm) | Width (cm) | watt Resistance | Resistance Type |
|-------------|------------|-----------------|-----------------|
| 42,4 | 52,5 | 300 W | Classe 2 |
| 82,0 | 52,5 | 600 W | Classe 2 |
| 128,2 | 52,5 | 900 W | Classe 2 |
| 181,0 | 52,5 | 1200 W | Classe 2 |

TRAME 28 Mixed


| Height (cm) | Width (cm) | watt Resistance | Resistance Type | Standard mixed version | | Mixed version with kit | |
|-------------|------------|-----------------|-----------------|------------------------|--|-------------------------------|--|
| | | | | Centre distance | | Mixed version centre distance | |
| 42,4 | 52,5 | 300 W | Classe 2 | 48,5 | | 41,3 | |
| 82,0 | 52,5 | 600 W | Classe 2 | 48,5 | | 41,3 | |
| 128,2 | 52,5 | 900 W | Classe 2 | 48,5 | | 41,3 | |
| 181,0 | 52,5 | 1200 W | Classe 2 | 48,5 | | 41,3 | |

Electric / Mixed

Standard electric



Standard mixed with rear connectors



Mixed with kit and with external connectors



Electric with ambient temperature thermostat



Mixed with ambient temperature thermostat and with rear connectors



Mixed with kit with ambient temperature thermostat and with external connectors



TRAME Vertical

Additional colour charge

The additional charges are calculated on the base price of RAL 9010.

| | |
|-------------------|--|
| C0 Category | without any additional charge (RAL 9010) |
| C1 Category | +10% |
| C2 Category | +20% |
| C3 Category* | +20% |
| Colours according | to samples request feasibility and cost estimate |
| PLATED finishes | NOT available |

* excluding the GRGR chrome grey colour which is NOT available

Supports

The TRAME vertical model can only be installed on the wall with the specific brackets which are included in the price. The kit however does not contain the screws and anchors for fixing the brackets to the wall.


Packing

The cardboard packing box is included in the price of sale of the products, and it contains the following components:

- the radiator ordered
- the wall-fixing brackets
- manual vent valve

Rear Connectors


Enable connection to the system vain GVR (Remote Valve Assembly) supplied as an accessory.

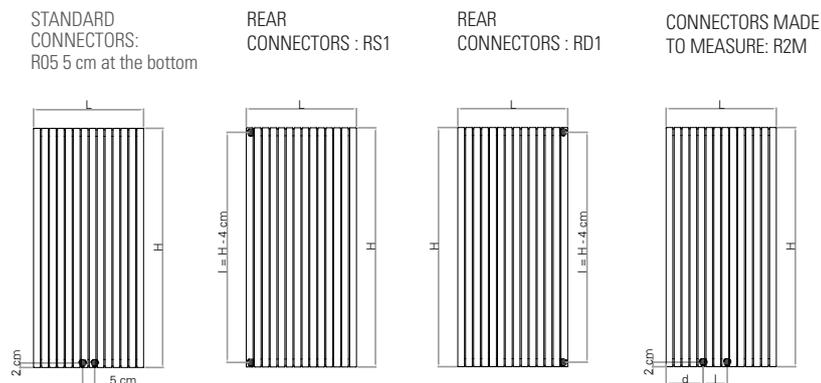

External connectors

Allow connection to the system TRADITIONAL VALVE AND LOCKSHIELD, supplied as accessories with additional charge.

| | |
|--|--|
| CONNECTORS UPON REQUEST: OB2 at the bottom | CONNECTORS UPON REQUEST: B2M made to measure |
|--|--|

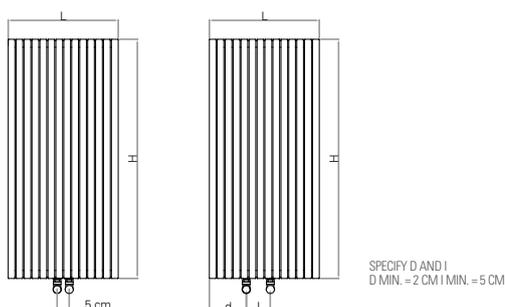

TRAME 28 / Vertical

| N° El. | Width (cm) | Height (cm) | | | | | | | | | |
|--------|------------|---------------|--|---------------|--|---------------|--|---------------|--|---------------|--|
| | | 96,0 | | 125,0 | | 154,0 | | 183,0 | | 196,0 | |
| | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C | |
| 9 | 29,2 | 432 | | 537 | | 634 | | 724 | | 762 | |
| 11 | 35,8 | 528 | | 657 | | 775 | | 885 | | 931 | |
| 13 | 42,4 | 625 | | 776 | | 916 | | 1046 | | 1101 | |
| 15 | 49,0 | 721 | | 895 | | 1057 | | 1207 | | 1270 | |
| 17 | 55,6 | 817 | | 1015 | | 1198 | | 1367 | | 1439 | |
| 19 | 62,2 | 913 | | 1134 | | 1339 | | 1528 | | 1609 | |
| 21 | 68,8 | 1009 | | 1253 | | 1480 | | 1689 | | 1778 | |
| 23 | 75,4 | 1105 | | 1373 | | 1620 | | 1850 | | 1947 | |
| 25 | 82,0 | 1201 | | 1492 | | 1761 | | | | | |
| 27 | 88,6 | 1297 | | 1612 | | 1902 | | | | | |
| 29 | 95,2 | 1393 | | 1731 | | 2043 | | | | | |
| 31 | 101,8 | 1489 | | 1850 | | 2184 | | | | | |
| 33 | 108,4 | 1585 | | 1970 | | 2325 | | | | | |
| 35 | 115,0 | 1682 | | 2089 | | 2466 | | | | | |
| 37 | 121,6 | 1778 | | 2208 | | 2607 | | | | | |

TRAME 20 / Vertical

| N° El. | Width (cm) | Height (cm) | | | | | | | | | |
|--------|------------|---------------|--|---------------|--|---------------|--|---------------|--|---------------|--|
| | | 96,0 | | 125,0 | | 154,0 | | 183,0 | | 196,0 | |
| | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C | | Watts ΔT 50°C | |
| 11 | 27,0 | 413 | | 515 | | 606 | | 686 | | 719 | |
| 13 | 32,0 | 488 | | 609 | | 717 | | 811 | | 850 | |
| 15 | 37,0 | 563 | | 703 | | 827 | | 936 | | 980 | |
| 17 | 42,0 | 638 | | 796 | | 937 | | 1061 | | 1111 | |
| 19 | 47,0 | 713 | | 890 | | 1047 | | 1186 | | 1242 | |
| 21 | 52,0 | 788 | | 984 | | 1158 | | 1311 | | 1373 | |
| 23 | 57,0 | 863 | | 1077 | | 1268 | | 1435 | | 1503 | |
| 25 | 62,0 | 938 | | 1171 | | 1378 | | 1560 | | 1634 | |
| 27 | 67,0 | 1013 | | 1265 | | 1488 | | 1685 | | 1765 | |
| 29 | 72,0 | 1088 | | 1358 | | 1599 | | 1810 | | 1896 | |
| 31 | 77,0 | 1163 | | 1452 | | 1709 | | 1935 | | 2026 | |
| 33 | 82,0 | 1238 | | 1546 | | 1819 | | | | | |
| 35 | 87,0 | 1313 | | 1639 | | 1929 | | | | | |
| 37 | 92,0 | 1388 | | 1733 | | 2040 | | | | | |
| 39 | 97,0 | 1463 | | 1827 | | 2150 | | | | | |